

Hunter HDMI Extender 200 mtr extender over Cat6

9473- HUC-EHD200M

User Manual



Product Introduction

Hunter 200M HDMI IP Extender is based on TCP/IP standard. It transmits your HD display with the high resolution up to 200 meters away from your DVD or computer source by using one CAT5e/6 cable. At the same time, it's convenient to transmit HDMI audio and video source by point-to-point mode, point-to-multipoint mode and cascade connection mode.

Features

- Up to 200m Transmission Range over Cat6 cables
- Full HD Resolution – 1080P @ 60Hz
- H.264 Video Compression – Efficient, high-quality streaming
- Support point-to-point mode, one point-to-multi point mode and cascade connection mode.
- Works over standard IP/Ethernet networks (802.3)
- Compact TX & RX Pair – Included for plug-and-play setup
- Ideal for AV Integration, Digital Signage, Surveillance, Retail Displays



Specifications

Product Name	Hunter HDMI Extender 200 mtr extender over Cat6
Model No	9473- HUC-EHD200M
Resolutions	480P/720P/1080P
Audio	Stereo
Power adapter format	Input AC (50HZ, 60HZ) 100V-240V; output: DC5V/1A
The max working current	TX 350mA, RX 450mA
Size(L-W-H)	90*91*19mm
Weight	120g x 2
Operating Temperature/Humidity	0°C-45°C/10%-80%RH(no condensation)
Storage Temperature/Humidity	-10°C-70°C/5%-90%RH(no condensation)

Physical Interface Diagram



- 1.DC/5V - Power adapter port
- 2.PWN - Power indicator
- 3.Status - Status indicator
- 4.Link - Network connection indicator
- 5.Reset - restart key
- 6.HDMI In- connect HDMI signal source
- 7.HDMI Out -HDMI output
- 8.Ethernet - Network interface by cat5e/6



Connectivity & Operating

- 1.Connect the HDMI source (such as DVD, PS3, STB) to the “HDMI IN” of transmitter by HDMI cable.
- 2.Connect the “HDMI out” of Receiver to display by HDMI cable.
- 3.Connect the Transmitter and Receiver with one cat5e/6 cable (recommend). the furthest distance is 200M.
- 4.Connect two pieces of 5V power supply to the transmitter and receiver, and power on Now the PWN indicator of the units is lightened; when the link indicator twinkling, status indicator light up, means the units start successfully.



Digital Signage



AV Integration




Surveillance



Retail Store

Connection Diagram

Point to multipoint application

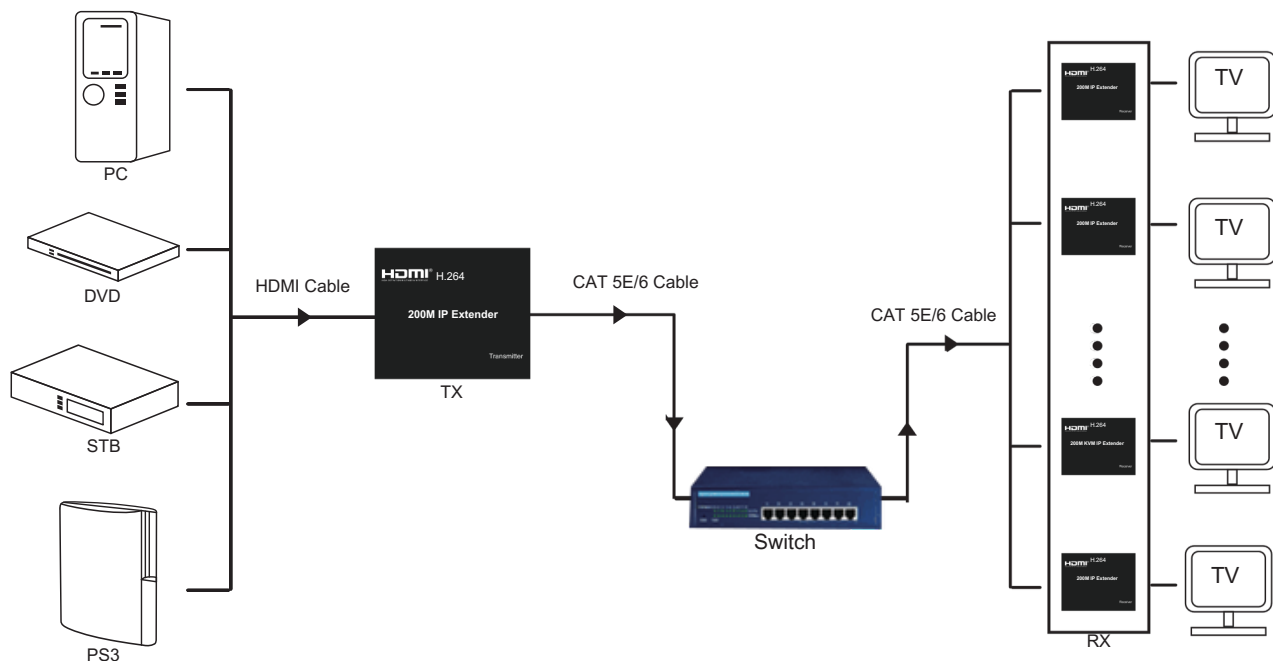

Package Content



Hunter
TX Extender



Hunter
RX Extender



IR Baster & IR Receiver

Warranty 1 Year



If your product does not work properly because of a defect in materials or workmanship, our Company (warrantor) will, for the length of the period indicated as 1 Years, which starts with the date of original purchase ("Limited Warranty period"), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product. The decision to repair or replace will be made by the warrantor.

During the "Labor" Limited Warranty period there will be no charge for labor. During the "Parts" warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers product purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.