

Hunter HDMI 2.0 Cables - AOC 4K High Speed Cables

# Connections for Life





**4K**  
**ULTRA HD** 

**18 Gbps**  
High Speed Transmission



No Signal Loss



Instantaneous Transmission



Protects From Interference

### Sizes / Cable Lengths (Meters)

**10 Mtrs | 15 Mtrs | 20 Mtrs**

**30 Mtrs | 50 Mtrs | 70 Mtrs | 100 Mtrs**



### WARRANTY : 5 Years

If your product does not work properly because of a defect in materials or workmanship, our Company (warrantor) will, for the length of the period indicated as 5 Years, which starts with the date of original purchase ("Limited Warranty period"), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product. The decision to repair or replace will be made by the warrantor.

During the "Labor" Limited Warranty period there will be no charge for labor. During the "Parts" warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers product purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.

## Features

Compatible with all HDMI standard devices

Compliant with HDMI 2.0 version specification

Supports long distance upto 150 meters

Plug & Play, no drivers, no external power needed

Photoelectric conversion chip for improved compatibility & stability


Zinc Alloy shell Gold Plated Connectors for durability

### Packaging

Poly in Box 


Spool  in Box 

<b>Name</b>	HDMI 2.0 Active Optical Cable
<b>Model No.</b>	905x-HU-4KAOC-MM-xxM (10 Meters ~ 100 Meters)
<b>Resolution</b>	4K@60Hz (downward compatible with all standard HDMI devices)
<b>Bandwidth</b>	18Gbps
<b>Chip</b>	Imported photoelectric conversion chip
<b>Color space</b>	4:4:4 Max
<b>Color depth</b>	12 bit Max
<b>Connector Type</b>	Male - Male
<b>Core</b>	4-core fiber + 7-core tinned copper
<b>Outer diameter</b>	5.2mm
<b>Shell</b>	Zinc alloy
<b>Jacket</b>	PVC, RoHS Directive-compliant
<b>Power supply</b>	No external power supply required, plug and play
<b>Support</b>	HDCP 2.2/HDR10/EDID/CEC/DDC/ARC/3D
<b>Power consumption</b>	250mW
<b>Working temperature</b>	-40°C~70°C
<b>Voltage/Current</b>	5V/100mA

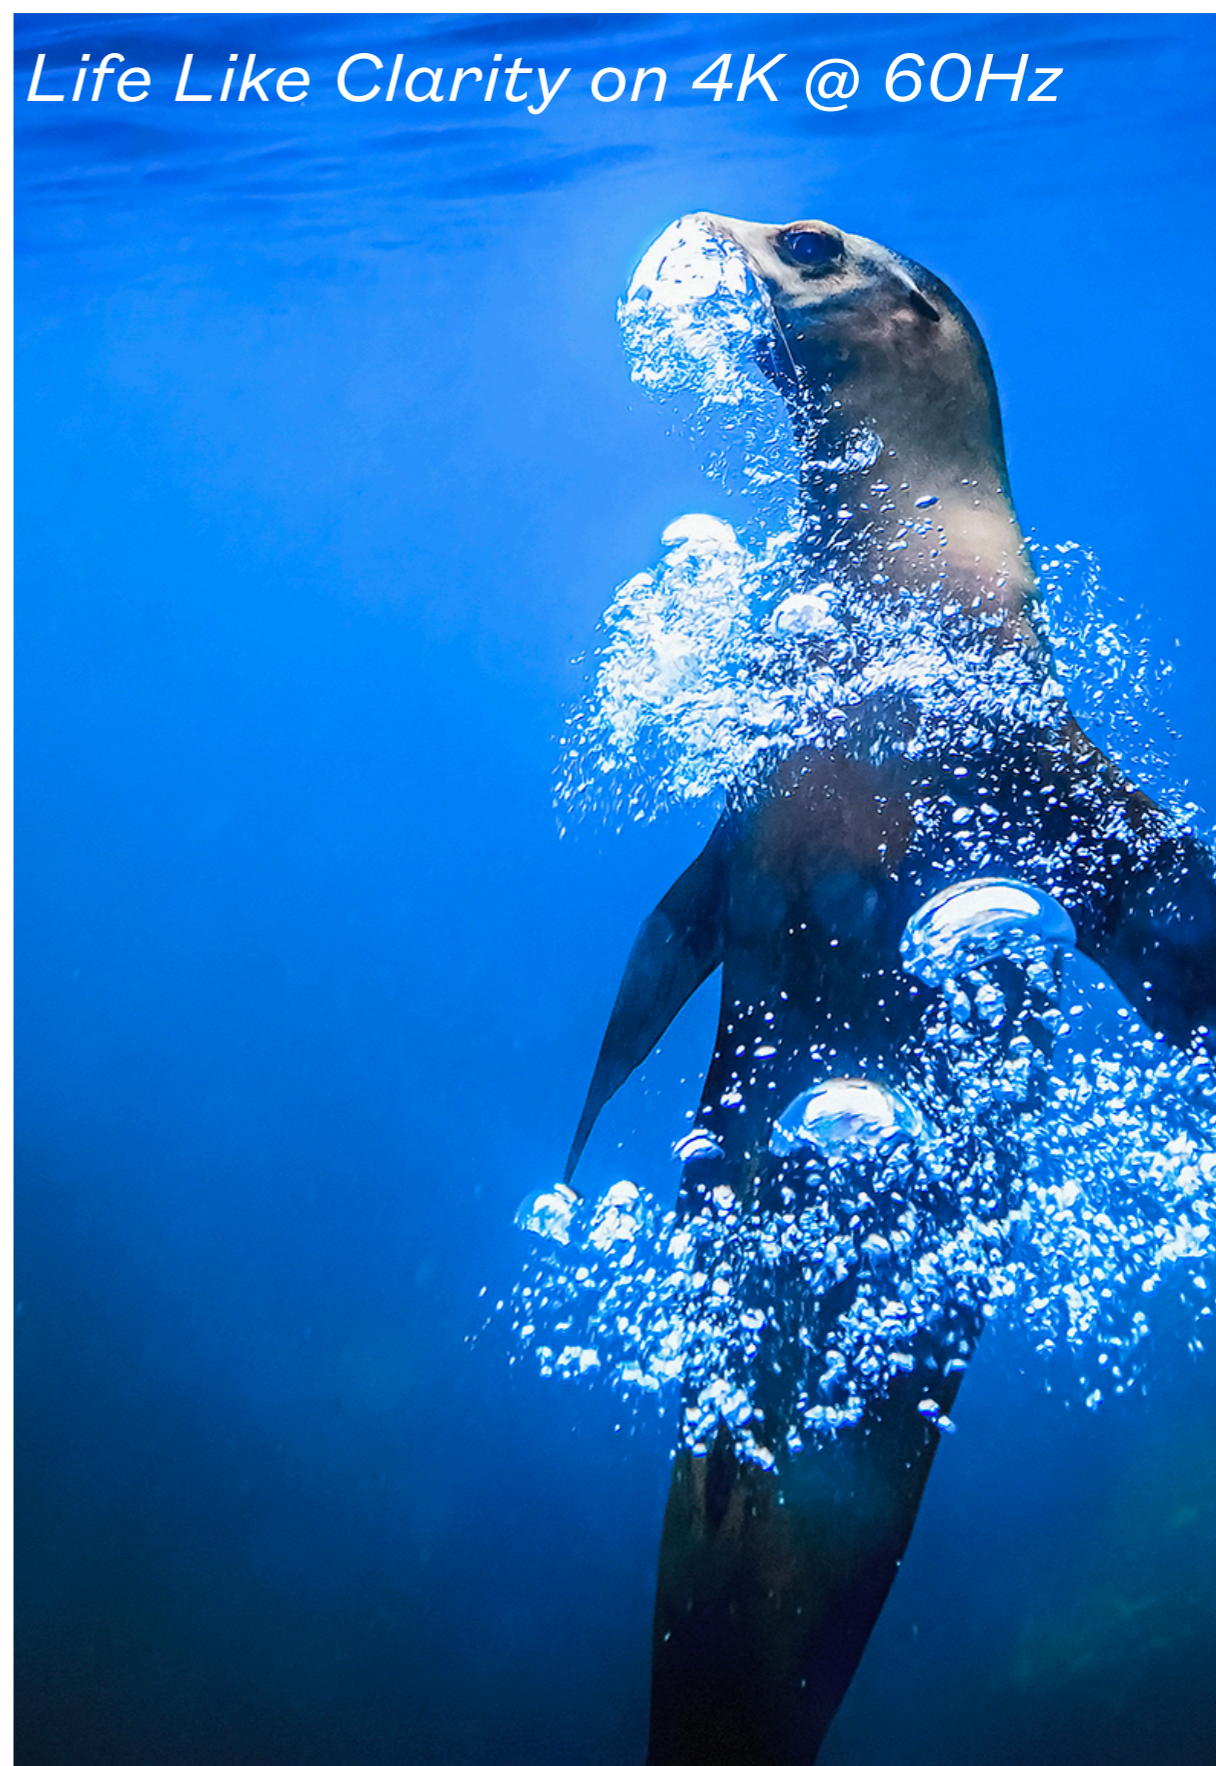


# Cable Design & Drawing Specifications

MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN
⚠					

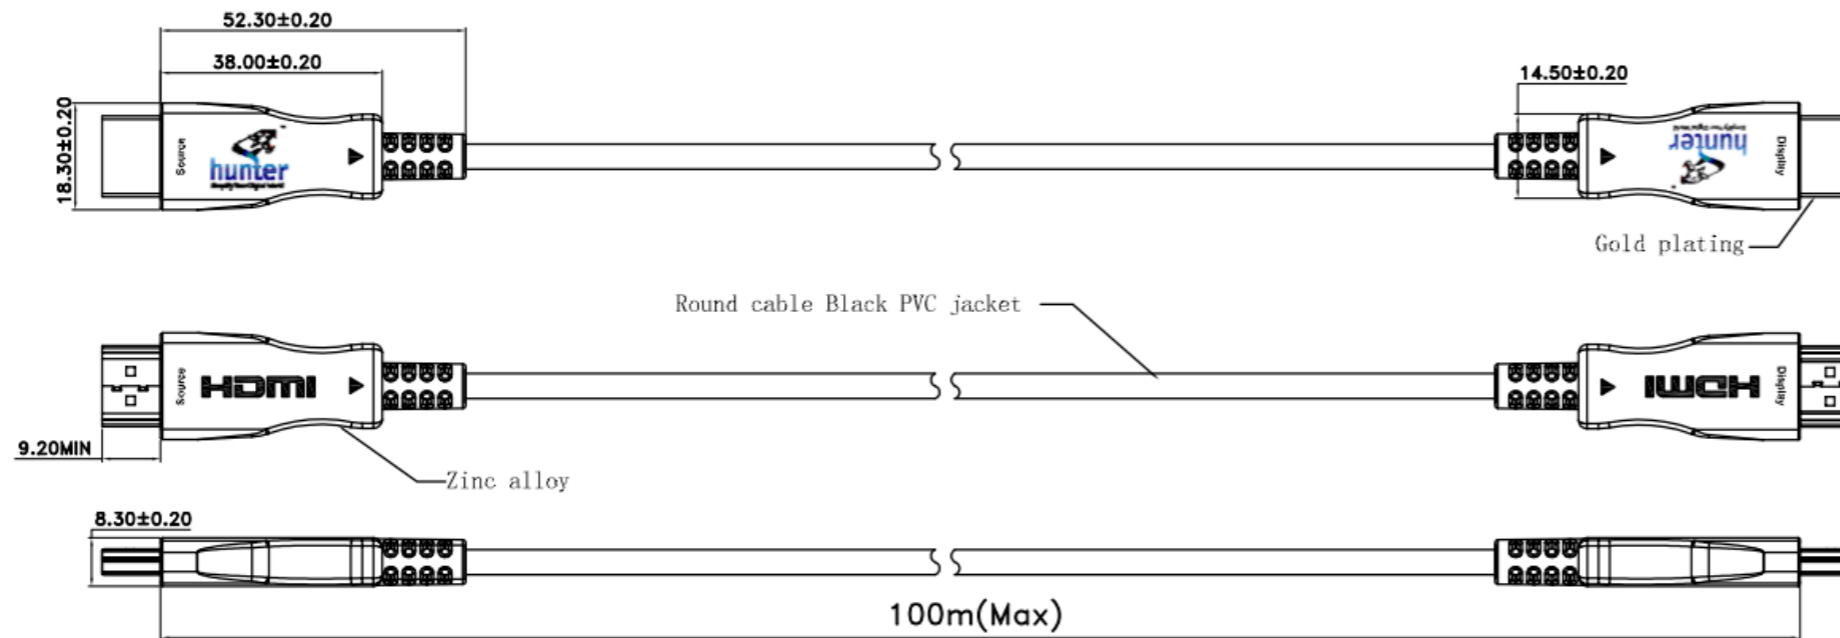


**NOTE:**

- Supports computer resolutions to 4K@60Hz@4:4:4
- Plug and Play
- Compatible with HDMI 2.0 standard.
- Support HDCP2.2@ARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel

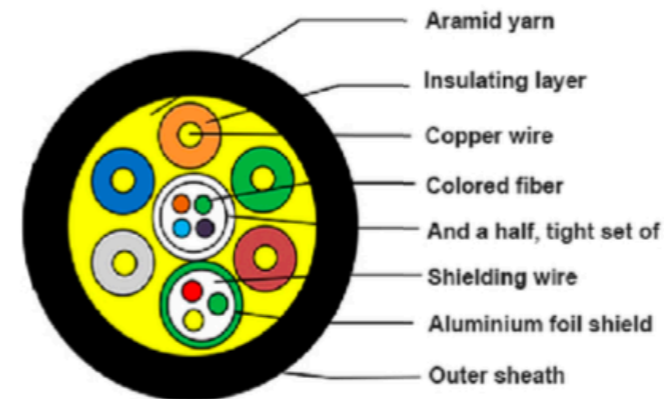

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
.X	±3.0°	.X	±0.10
.XX	±2.0°	.XX	±0.05
.XXX	±1.0°	.XXX	±0.03

Product		HDMI 2.0 AM-AM(AOC)			
Model/Series		HU-HDCU14-MM			
	mm	1:1	1/1	1	

www.hunterindia.in