

Hunter 4x1 HDMI Switch HDMI 2.0 with Audio

9347-HUC-SW401A2.0

USER MANUAL



Product Introduction

Hunter 4x1 HDMI Switch support four HDMI ports by remote control or button to switch to a display terminal. The HDMI switch can support all HD formats including 720p,1080i, 1080p, 2160p multichannel audio. This product comes with a digital audio outputs (optical fiber and coaxial) and one 3.5mm headphone output, so it is more suitable for home theatre systems.


Features

- Support 3D
- Support HDCP2.2
- Support highest video resolution 3840x2160/60Hz
- Support ARC
- Support 24/30/36 bit deep color
- Support single and high definition for multiple sources, such as DVD players, A/V receivers, set top boxes
- DC5V/1A power supply




Specifications

Product Name	9347- Hunter 4x1 HDMI Switch HDMI 2.0
HDMI Resolution	Up to 3840x2160/60Hz
Support video format	3D
Support video color format	24/30/36 bit deep color
Support audio format	DTS-HD/Dolby-TrueHD/DTS/Dolby AC3/DSD
Max bandwidth	600MHz
Max band rate	6x3Gpbs
Input cable distance standard cable	≤5m(4k 60Hz),≤15m(4k 30Hz), 1080p,AWG26 HDMI
Output cable distance standard cable	≤5m(4k 60Hz),≤15m(4k 30Hz), 1080p,AWG26 HDMI
Max working current	450mA
Power adapter format input	Ac (50Hz, 60Hz) 100V-240V ; Output: DC5V/1A
Operating temperature range	-15c to +55c
Dimensions (LxWxH)	167x67x28 mm
Weight	240g

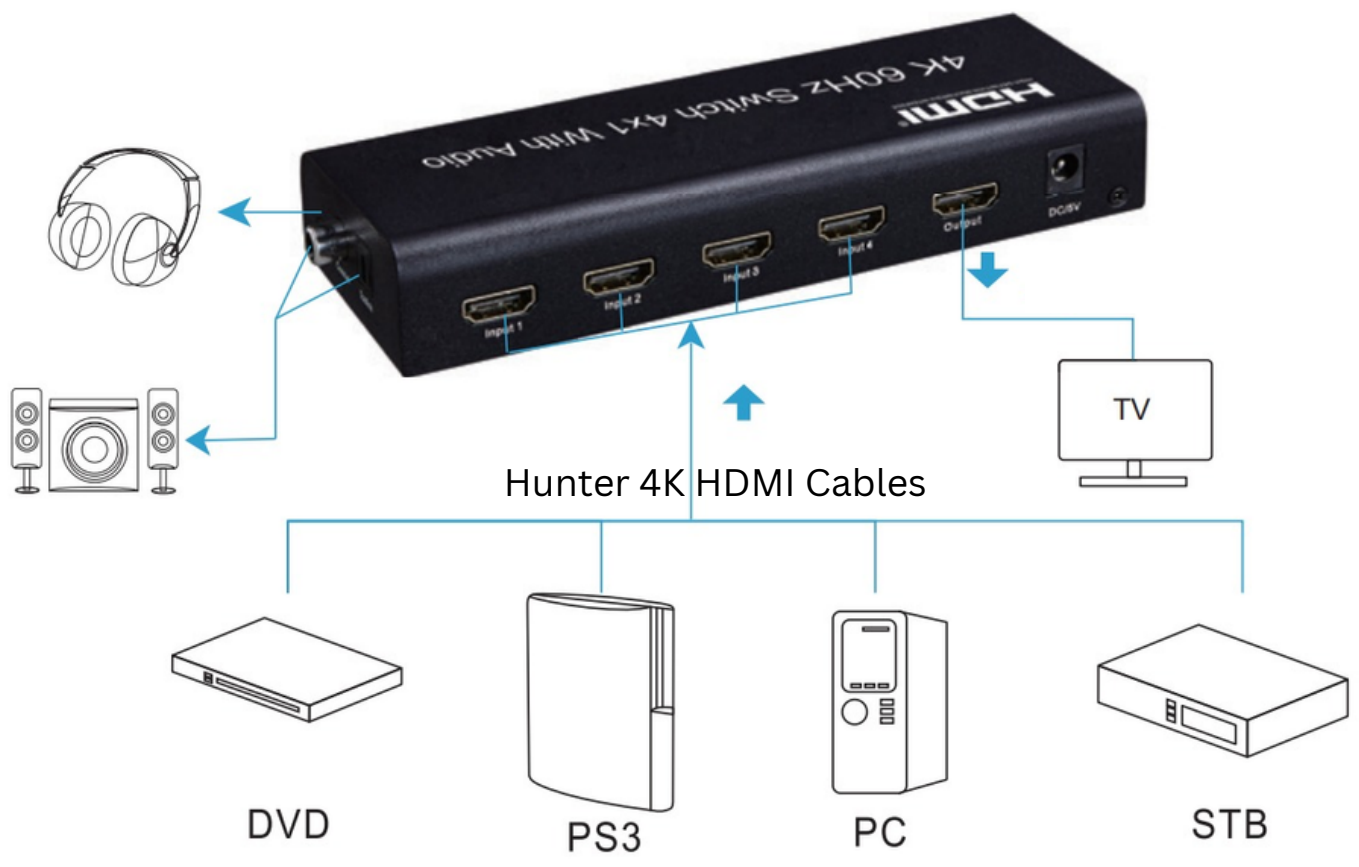


www.hunterbharat.com

Audio Output

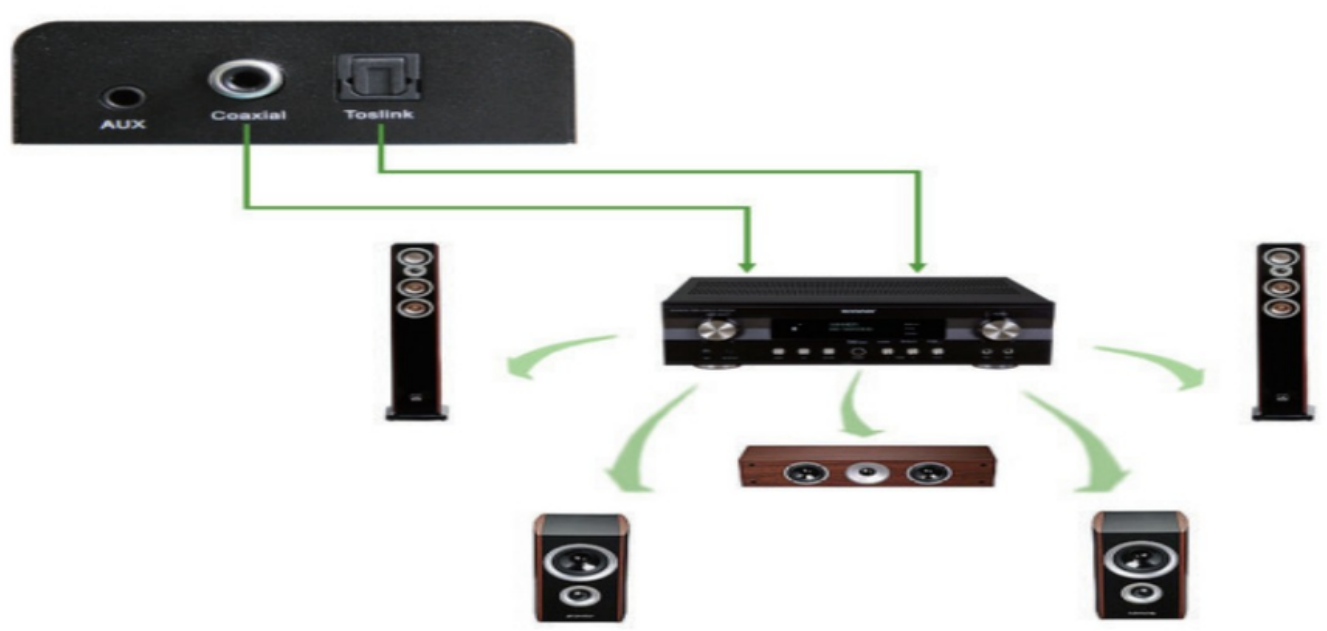


Physical Connection Showing Picture

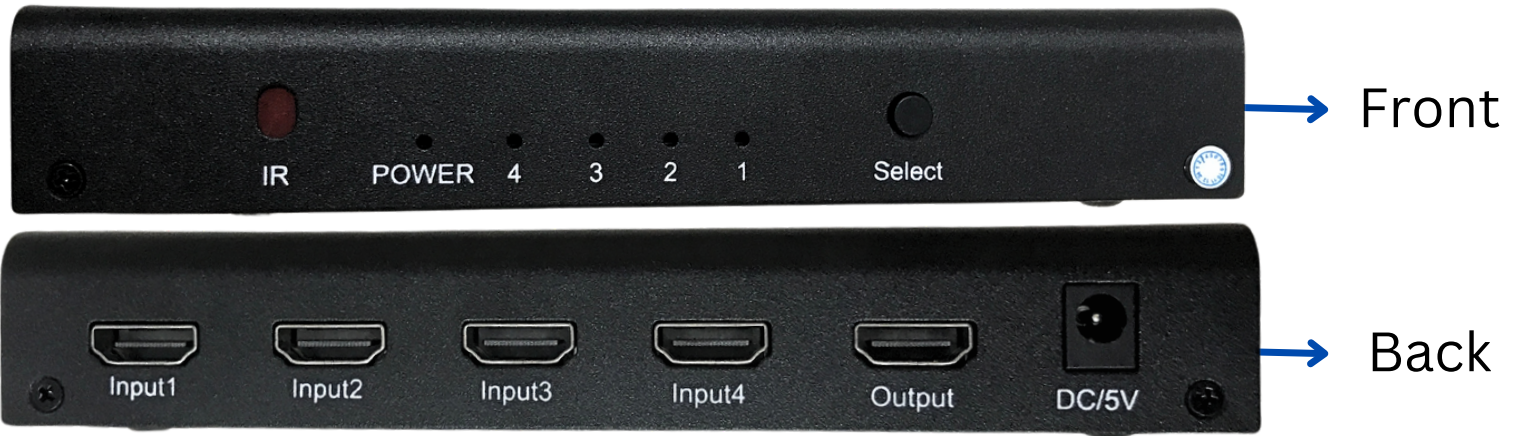

Operating & Connecting


- Connect the HDMI Source devices and HDMI switch input port with four HDMI cables
- Connect HDMI display device (monitor or projector) with HDMI switch output ports with one HDMI cable
- Connect 5V/1A power adapter with HDMI switch

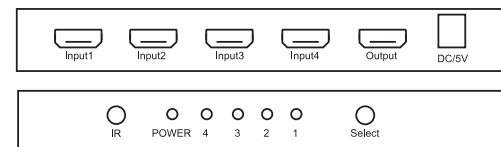

Physical Connection Showing Picture

Audio Channel Switching Operations

Select the “Select” button of the switcher button 5 seconds, which can switch between 5.1 and 2.1 audio channel



Remote Control



- Press the Key 1 to switch to the input 1, L 1 indicator lights up
- Press the Key 2 to switch to the input 2, L 2 indicator lights up
- Press the Key 3 to switch to the input 3, L 3 indicator lights up
- Press the Key 4 to switch to the input 4, L 4 indicator lights up

Package Includes

Hunter 4x1 HDMI
Switch HDMI 2.0



Remote Control

