

Hunter Full HD Wireless HDMI Extender 200 M Set (1+4)

9442-HTC-200WEHD

USER MANUAL



Transmitter



Receivers

Product Introduction

Hunter HDMI Wireless Extender utilizes 2.4G and 5G modules to facilitate high-speed, high-performance wireless transmission between consumer electronics, computers, and mobile devices. By combining high bandwidth capacity with robust error correction capabilities, it ensures the transmission of HD video signals. This extender can transmit signals up to 200 meters in open areas and is capable of penetrating walls (the transmission range will reduce based on the walls & other interferences).

Features

- Transmits Full HD wirelessly up to 200 meters.
- Supports both one-to-one and one-to-four transmission configurations.
- High-resolution support up to 1080 for crisp visuals.
- Utilizes IEEE802.11a/b/g/n wireless standards for reliable connectivity.
- HDCP1.3 compliance ensures secure transmission of copyrighted content.
- Bandwidth of 148.5MHz for smooth data transfer.
- Maximum baud rate of 1.485Gbps for high-speed transmission.
- Includes stereo audio support for immersive sound experience





Specifications



- | | |
|-----------------------------------|--|
| • HDMI Resolution | up to 1920x1080p/60Hz |
| • Support Audio Format | Stereo audio |
| • Max Bandwidth | 148.5MHz |
| • Max Baud Rate | 1.485Gbps |
| • Input cable distance | (1080p resolution) ≤8m AWG26 HDMI standard cable |
| • Output cable distance | (1080p resolution) ≤8m AWG26 HDMI standard cable |
| • Transmitter max working current | 1.2A |
| • Receiver max working current | 800mA |
| • Operating temperature range | (-15°C to +55°C) |
| • Dimension (L x W x H) | 80x63x16 (mm) each unit |
| • Weight (in grams) | 123grams for each |

Operating and Connecting:

TX

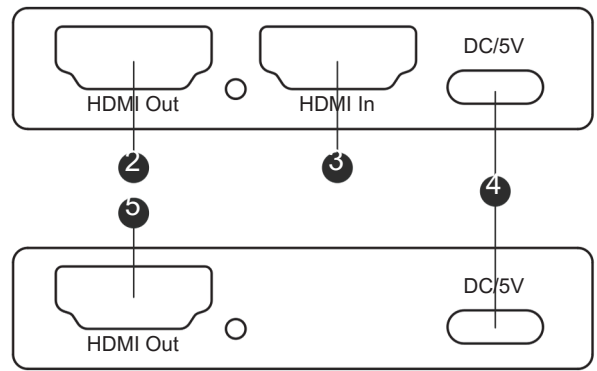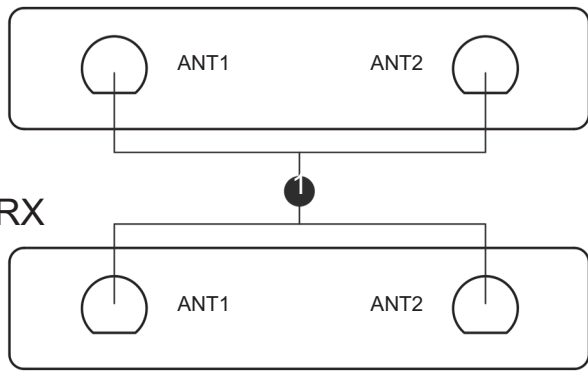

RX

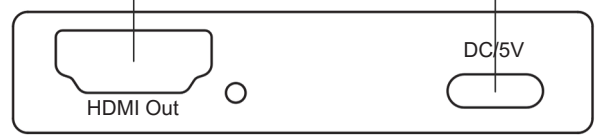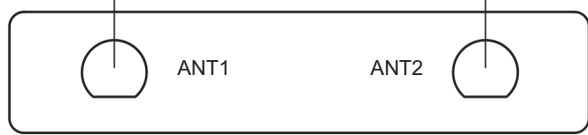


- 1: ANT1-2 --- Antenna
- 2: HDMI Out --- HDMI loop-out port
- 3: HDMI In --- HDMI Input

- 4: DC/5V --- 5V DC Power input port
- 5: HDMI Out --- HDMI Out port



Connection Diagram

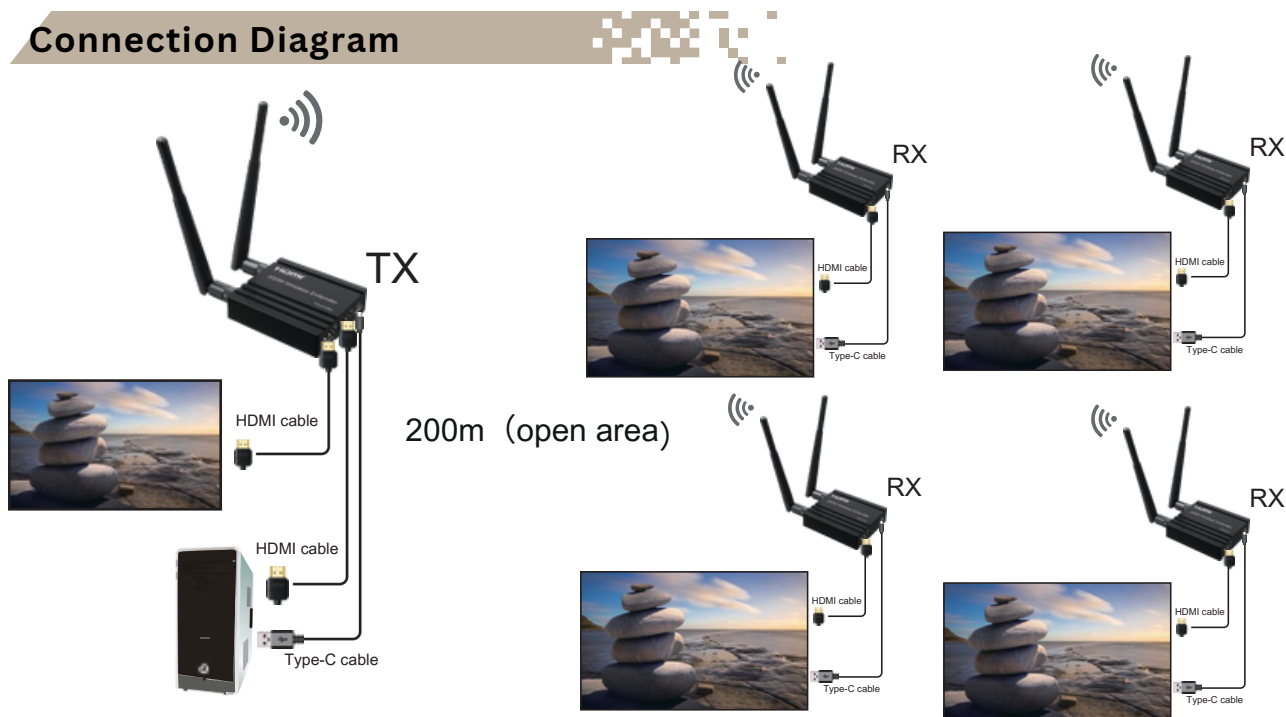

Connection and Operation:

1. Connect the HD source to the input of the wireless extender TX with 1 HDMI cable
2. Connect the output of the wireless extender RX to the display device with 1 HDMI cable
3. Connect power to the TX and RX with Type-C USB cable.

Pairing:

- Connect the Transmitter and receiver to the power supply
- Use the HDMI cable provided to connect HDMI port of Transmitter with the HDMI port of receiver
- Wait till the link indicator stops blinking. The pairing is complete.

Warranty 1 Year



If your product does not work properly because of a defect in materials or workmanship, our Company (warrantor) will, for the length of the period indicated as 1 Years, which starts with the date of original purchase ("Limited Warranty period"), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product. The decision to repair or replace will be made by the warrantor.

During the "Labor" Limited Warranty period there will be no charge for labor.

During the "Parts" warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers product purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.