

# Hunter 1x16 HDMI Splitter

**9153-HUS-HD1x16-4K30**

## User Manual



## Product Introduction


Hunter HDMI 4K 1x16 Splitter uses a single HDMI source, accessing to multiple HDMI outputs. It allows one HDMI device to be split easily to sixteen HDMI compatible monitors or projectors. The Splitter can also be placed at the end of a long HDMI cable to regenerate the HDMI signal. Resolution support is up to 3840X2160/30Hz.

## Features

- Supports HDMI 1.4b
- Support 3D video format
- Resolution up to 3840x2160/30Hz
- Supports 3.4Gbps data rate for TMDS clock up to 340MHz
- Supports deep color 8/10/12bit
- Supports displaying single source to multi-output high-definition signal source from DVD player A / V receiver, set-top box
- Need DC 12V/3A power supply

## Operating & Connections

- Connect 1 HDMI cable from HDMI source devices into HDMI Splitter input.
- Connect 16 HDMI cables from each of the displays (monitors or projectors) into the HDMI Splitter outputs
- Connect 12V/3A power supply to the HDMI Splitter 1x16

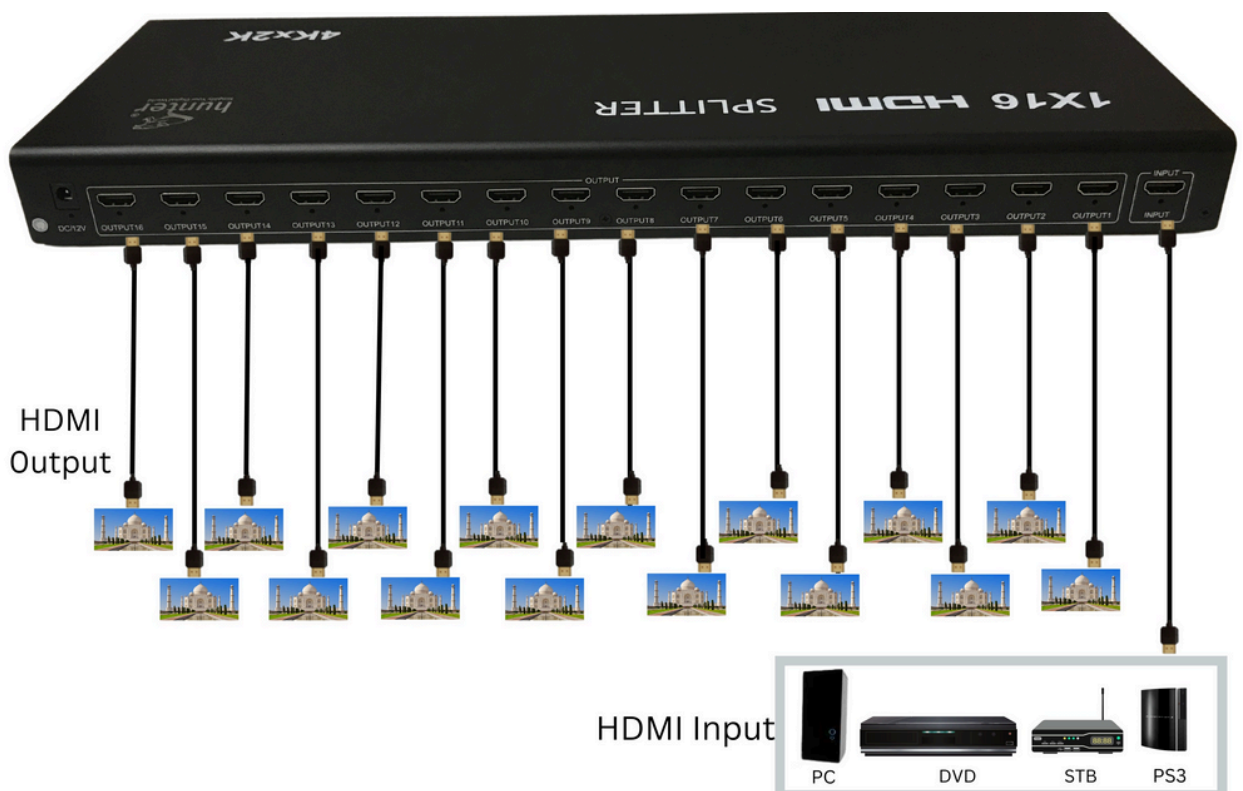

## Specifications

Front

Back



HDMI version  
HDMI resolution  
Support video color format  
Support audio format  
Max bandwidth  
Max transmission bandwidth  
Input cable distance

Output cable distance

HDMI output  
Max working current  
Power adapter format Input  
Operating Temperature range  
Operating Humidity range  
Dimension (L x W x H)  
Weight

HDMI 1.4b  
3840x2160/30Hz  
deep color 8/10/12bit  
DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD  
340MHz  
3.4Gbps  
(1080p resolution) ≤10m, (4K resolution) ≤5m AWG26  
HDMI standard cable  
(1080p resolution) ≤15m, (4K resolution) ≤10m AWG26  
HDMI standard cable HDMI1  
16  
1.15A  
AC (50HZ, 60HZ) 100V-240V; Output: DC12V/3A  
(-15 to +55°C)  
5 to 90%RH (No Condensation)  
460x150x40 (mm)  
1620g



Teaching



TV Store



Market

**WARRANTY : 1 Year**



If your product does not work properly because of a defect in materials or workmanship, our Company (warrantor) will, for the length of the period indicated as 1 Years, which starts with the date of original purchase ("Limited Warranty period"), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product. The decision to repair or replace will be made by the warrantor.

During the "Labor" Limited Warranty period there will be no charge for labor. During the "Parts" warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers product purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.